


USB-C™ Pro Multiport Hub 14 Port


CMH-14



2x 4K HDMI, 1x VGA
Video Connection



USB 3.2 Gen2
1x USB-A, 2x USB-C



RJ45 Gigabit
Ethernet Port



SD/microSD Slot

No more limits for your laptop

Introducing the USB-C Pro Multiport Hub 9 Port CMH-14, a connectivity powerhouse for streamlined productivity. Unleash enhanced connectivity by converting a single USB-C port into nine versatile ports, including USB 3.2 Gen2 and HDMI.

Swift data transfer is at your fingertips with USB 3.2 Gen2 technology, ensuring efficient workflows and minimal wait times. Immerse yourself in crisp 8K video output through the HDMI port, ideal for presentations, movie watching, or expanding your workspace with crystal-clear visuals. Do you need a card reader too? Well this Hub comes with card reader slots for both SD and microSD memory cards.


Plug the Hub into the USB-C™ port on your laptop to immediately increase your working possibilities.

USB-C™ Pro Multiport Hub

14 Port

CMH-14

General Information	
Material	Aluminum+ABS
Colour	Silver
Interfaces	
Host Connection	USB-C™ 3.2 Gen1 with up to 85W power pass-through
Cable length	15 cm
Video Ports	HDMI 1: up to 4K@60Hz (3840x2160) (work separately while source is DP1.4), up to 4K@30Hz (3840x2160) (work separately while source is DP1.2) HDMI 2: up to 4K@30Hz (3840x2160)
Audio	3.5mm Audio & Microphone (CTIA Standard)
SD/microSD Slot	Read: up to 104MB/s, Write: up to 80MB/s (Data transfer rate are subject to the speed of the memory card itself and your computer's USB ports)
Ethernet Port	1x RJ45 Gigabit Ethernet up to 1Gb/s
USB-A ports	2x USB-A 2.0, up to 480Mbps data speed. Designed for the connection of 2.4 GHz wireless devices, such as wireless keyboards/mouse adapters etc. 3x USB-A 3.2 Gen1, up to 5Gb/s data speed & maximum power output 5V/0.9A, backwards compatible with USB 2.0.
USB-C ports	1x USB-C 3.2 Gen1 for Data Transfer, up to 5Gb/s data speed & maximum power output 5V/0.9A. 1x USB-C PD charging port: Power Delivery (PD 3.2 Gen1), up to 100W upstream charging the source devices such as USB-C Laptop/MacBook.
Other Features	
Certificates	EAC/CE/UKCA/FCC
ROHS/REACH compliance	Yes
Storage and Operating Conditions	
Operating Temperature	0°C ~ +40°C
Storage Temperature	-20°C ~ +70°C
Operating Humidity	10% ~ 85% RH (no condensation)

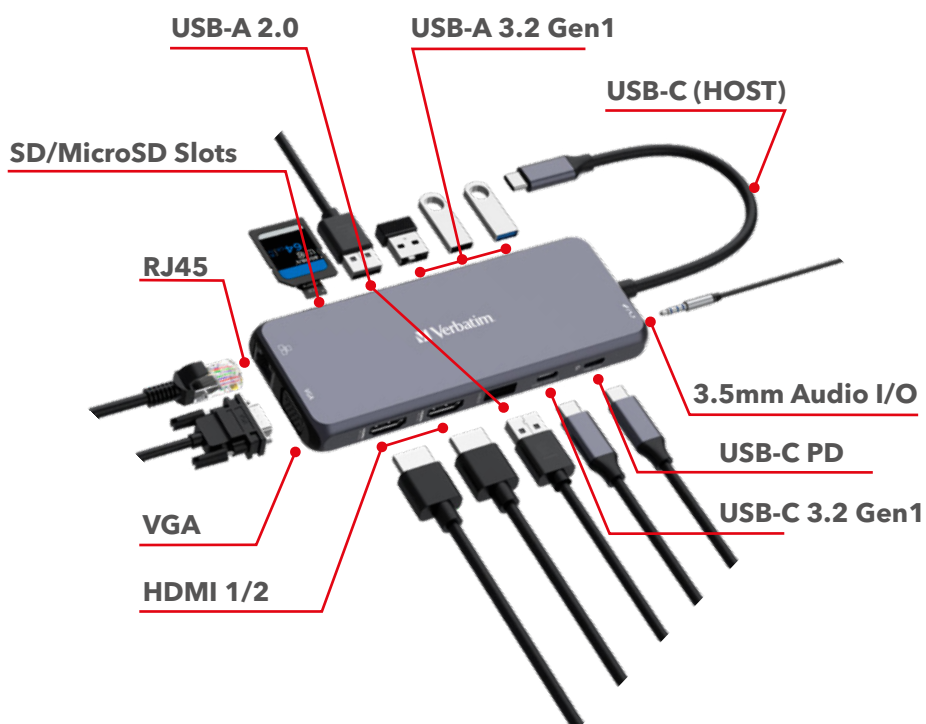

USB-C™ Pro Multiport Hub

14 Port

CMH-14



PN	Description	Bar Code	EAN128 Code	EAN14 Code
32154	USB-C Pro Multiport Hub 14 Port CMH-14	023942321545	(02)00023942321545(37)10(91)891 (02)00023942321545(37)40(91)891	20023942321549 50023942321540

Logistic Information	
Product Dimensions L x W x H	140 x 55.4 x 15mm
Product Weight	125 grams
Units per Pack	1
Pack Dimensions L x W x H	200 x 100 x 22mm
Pack Weight	186
Units per Inner Carton	10
Inner Carton Dimensions L x W x H	415 x 112 x 130mm
Inner Carton Weight	2010
Units per Outer Carton	40
Outer Carton Dimensions L x W x H	435 x 245 x 290mm
Master Cartons Weight	8600
Master Cartons per Layer	8
Layers per Pallet	3
Units per Pallet	960

USB-C™ Pro Multiport Hub

14 Port

CMH-14



Front Angled



Back Angled



Left Side Angled



Right Side Angled



Top Angled



Ports



Right Side Angled Lit



Packaging 3D



Packaging flat



Lifestyle 1



Lifestyle 2



Lifestyle 3

System Requirements:

- Interface: USB-C must support video output.
- OS: Windows OS 7/8/10/11 (X86/X64), Mac OS 10.2 Above, Chrome OS, Linux, Android 7 or above

Pack Contents:

- USB-C Pro Multiport Hub
- Quick Start Guide