


## EcoFlow PowerOcean LFP Battery

EcoFlow PowerOcean LFP Battery is a modular parallel connected high voltage battery system, which is compatible with our 3-phase inverter starting from only 1 battery. With CATL LFP battery chemistry, active and passive safety measures, we provide outstanding battery performance and reliability.

- Easy Battery Expansion at All Times, Up to 45kWh Capacity
- 800V High-voltage Battery, 1 Pack to Start a 3-phase Inverter
- CATL LFP Battery with 6000 Life Cycles
- Active Aerosol Fire Protection Module in Every Battery Pack
- Weather Proof with Auto-heating
- 180mm Ultra Thin, Frosting Matte Metal Exquisite Design



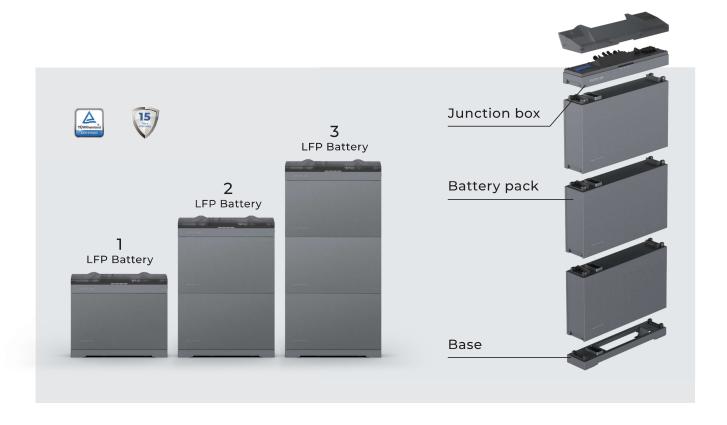

## Technical Parameters







| Number of battery packs  |                         | LFP Battery x 1                                  | LFP Battery x 2     | LFP Battery x 3    |
|--------------------------|-------------------------|--|---------------------|--------------------|
| Performance              | Battery module capacity | 5kWh   | 10kWh               | 15kWh              |
|                          | Max. output power       | 3.3kW  | 6.6kW               | 9.9kW              |
|                          | Max. input power        | 2.5kW  | 5kW                 | 7.5kW              |
|                          | Nominal voltage         | 51.2V  |                     |                    |
|                          | Operating voltage range | 40~57.6V   |                     |                    |
|                          | Battery cell type       | LFP  |                     |                    |
| Compliance               | Certificates            | IEC/EN62477, IEC/EN62619 (EN ISO 13849), UN 38.3 |                     |                    |
| General<br>specification | Dimension (W*D*H)       | 675.6*182.7*593.6mm                              | 675.6*182.7*989.8mm | 675.6*182.7*1386mm |
|                          | Power module weight     | 54kg   | 108kg               | 162kg              |
|                          | Installation            | Floor stand                                      |                     |                    |
|                          | Operating temperature   | -20°C~50°C                                       |                     |                    |
|                          | Max. operating altitude | 3000m  |                     |                    |
|                          | Cooling method          | Natural convection                               |                     |                    |
|                          | Noise level             | ≤30dB  |                     |                    |
|                          | Relative humidity       | 10~100% RH                                       |                     |                    |
|                          | Protection level        | IP65   |                     |                    |